


## IB-M2U02-R Internal RAID Converter for 2x M.2 SATA to 2.5" U.2 SSD

### Keyfeatures

- Internal RAID for 2x M.2 SATA to 2.5" U.2 SSD
- Internal interface SATA III up to 6 Gbit/s
- Host interface SATA Express up to 10 Gbit/s
- Enclosure in 2.5" SSD form factor, 9.5" mm building height
- For M.2 SATA SSD with B-Key or B+M-Key, 22x 30/42/60/80 mm
- Supports RAID 0, 1 and Single Mode
- Windows, Linux, Mac OS compatible

### RAID enclosure with new standards

The IB-M2U02-R accommodates up to two M.2 SSD. In RAID 0 you will have a SSD in a 2.5" format, which transfers data with up to 1 Gbyte/s via SATA Express. Optionally, the failure safety in Raid 1 can be increased, or you can easily operate each of the M.2 SSD in single mode for it's own. The housing has the exact dimensions of a 2.5" SSD so it fits in all common mounting brackets, if no M.2 connection is available or is to be used elsewhere.

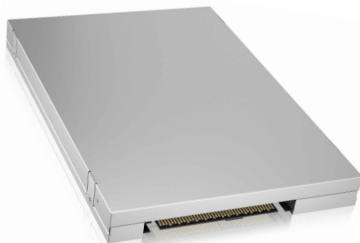

### Packaging content

1x IB-M2U02-R, 4x screw set, 1x manual

### Logistical data

Packing unit: 50 pcs./carton  
Total weight: 6.4 kg/carton  
Gross weight: 0.118 kg  
Net weight: 0.052 kg

Dimension/Carton: 410x330x200 mm  
Dimension (with packing): 135x100x25 mm  
Dimension of article: 100x70x10 mm  
Country of Origin: Taiwan

### Technical Data

Model	IB-M2U02-R
Article No.	60137
EAN Code	4250078164715
Brand	ICY BOX
Article text	RAID Converter for 2x M.2 SATA to 2.5" U.2 SSD
Color	Silver
Material	Aluminium
Chip	ASM1062R H/W
Internal connector	2x M.2 SATA with B-Key or B+M-Key
Internal Interface	SATA III up to 6 Gbit/s
Host connector	1x U.2 SFF-8639
Host Interface	SATA Express up to 10 Gbit/s
RAID	0, 1, Single
M.2 SSD format	22x 30/42/60/80 mm
Form factor	2.5" SSD, 9.5 mm building height
M.2 SSD capacity	No limit
Operation system	Windows, Linux, Mac OS compatible
Power	U.2 powered